


# NID, MDU & Terminals



- 2 SC or 4 LC connectors (Patch & Splice)
  - Indoor use, IK 9
  - Single gang electrical box mounting
  - Slide on cover
  - Dimensions: 7.08" x 3.26" x 0.94"
- PN: HE-SFMNT-01



- 1 SC or 2 LC connectors (Patch & Splice)
  - Indoor use, IK 9
  - Single gang electrical box mounting
  - Slide on cover
  - Dimensions: 3.5" x 5.8" x 0.65"
  - Low profile
- PN: HE-SFMNT-LP

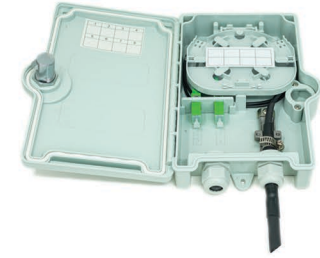


- 2 SC or 4 LC connectors (Patch & Splice)
  - Splitters: 1x2
  - Input: 1x10mm and dielectric flat drop
  - Output: 4.8mm
  - Indoor/Outdoor, IP65, K7
  - Wall mount
  - Key lock
  - Dimensions: 8.18" x 6.02" x 2.04"
- PN: HE-02NID-02



- 4 SC or 8 LC connectors (Patch)
  - Cable OD: 4x3mm-6mm or Flat 2x3mm
  - Indoor/Outdoor, IP65
  - Wall mount
  - Sliding latch and screw lock
  - 30ft of cable storage
  - Dimensions: 8.34" x 6.88" x 2.36"
- PN: HE-04NID-01




- 6 SC or 8 LC connectors (Patch & Splice)
  - 12 LC connectors (Patch only)
  - Splitters: 1x4
  - Input: 1x9mm
  - Output: 6x3mm or 4.8x8mm Flat Drop
  - Indoor/Outdoor, IP65
  - Screw lock
  - Wall mount
  - Dimensions: 8.26" x 5.51" x 1.52"
- PN: HE-06NID-01

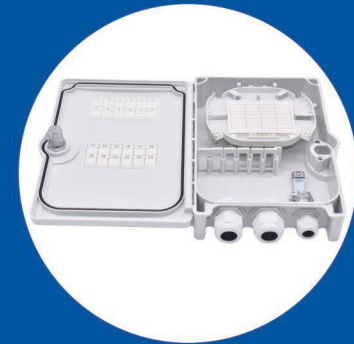


- 12 SC or 24 LC connectors (Patch & Splice)
  - Splitters: 1x8
  - Input: 1x10mm and dielectric flat drop
  - Output: 2x9mm - 18mm
  - Indoor/Outdoor, IP65, K7
  - Key lock
  - Dimensions: 10.15" x 7.32" x 2.48"
- PN: HE-12NID-01




- 1 SC or 1 Duplex LC connectors
  - Cable OD: 3mm - 5mm
  - Indoor/Outdoor, IP65
  - Wall mount
  - 50ft of cable storage
  - Dimensions: 13.46" x 13.03" x 3.35"
- PN: HE-01NID-01

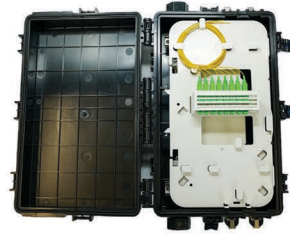

- 16 SC or 32 LC connectors
  - Input: 4x9mm - 16mm
  - Output: 16x3mm
  - Splice Tray: 2x24 fibers per tray
  - Indoor/Outdoor, IP55
  - Dimensions: 13.38" x 8.66" x 3.93"
- PN: SFST-S2

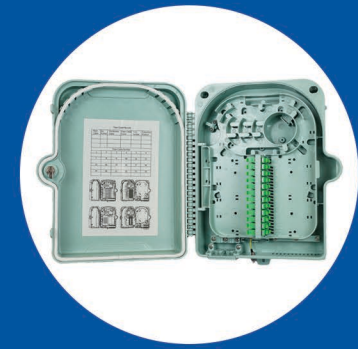

- 24 SC or 48 LC connectors
  - Splitters: 1x12 or 1x16
  - Input: 2x14mm
  - Output: 24x5mm
  - Splice: 1x24 fibers
  - Indoor/Outdoor, IP66
  - Wall or pole mount
  - Dimension: 12.59" x 9.44" x 3.93"
- PN: HE-48NID-01

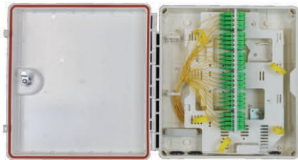

- 48 SC or 96 LC connectors
  - Splitters: 1x36 or 3x16
  - Cable OD: 2x19mm, 2x25mm
  - Splice Tray: 2x24 fibers per tray
  - Indoor/Outdoor, IP65
  - Wall or pole mount
  - Dimension: 14.17" x 17.71" x 6.10"
- PN: HE-96NID-01



- 4, 8, or 12 OptiTap®, 12 SC, or 24 LC connectors
  - Feeder Ports: 2x10mm - 17.5mm
  - Splice Tray: 4x24 fibers per tray
  - Outdoor, IP68
  - Strand, pole, pedestal, and ground vaults
  - Dimensions: 15" x 9.65" x 5.12"
- PN: OST Series



- 24 SC or 48 LC connectors
  - Feeder Ports: 2x10mm - 17.5mm
  - Branch Ports: 2x8mm - 17.5mm
  - Drop Ports: 16x3mm, 5mm, 8mm, or flat drop
  - Splice Tray: 4x24 fibers per tray
  - Outdoor, IP68
  - Strand, pole, pedestal, and ground vaults
  - Dimensions: 15.15" x 9.64" x 5.11"
- PN: SFST-S1