

OptiTap® Splice Terminal


NetSource's OptiTap® Splice Terminal is an IP68 rated enclosure that enables a single fiber feed to be split into multiple drops. The terminal serves as a junction between feed fibers and drop fibers. The terminal is available with 4, 8, and 12 hardened fiber SC/APC adapter and is compatible with OptiTap® drop cables. These fully-sealed IP68 closures can be utilized on strands, poles, pedestals, and ground vaults or enclosures. It is available pre-loaded in a variety of configurations with splice trays and pigtails.

Features

- Accepts 4, 8, and 12 OptiTap®, 12 SC, or 24 LC connectors
- Feeder Port: 2x10mm - 17.5mm
- Splice Trays: 4x24 fibers per tray
- Outdoor, IP68 rated
- Strand, pole, pedestal, and ground vaults
- Dimensions: 15" x 9.65" x 5.12"



PN: OST Series

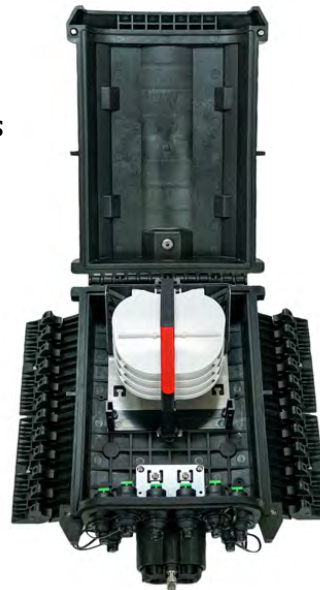

260 Progress Drive
Manchester, CT 06042

P: +1 (800)-557-8818
F: 860-649-6002
info@netsource-inc.com

**Our Commitment to Quality and
Customer Service is Our Connection to You**