

Indoor/Outdoor Fiber Enclosures — IP65-Rated

HE-04NID-02



- Connector Capacity: 4 SC or 8 LC
- Splitter: 1x2 or 1x4
- Splices: Up to 4
- Input/Output: Flat Drop, ROC, and 3-16.2 mm Round Cable
- 1" Conduit Tie-Down
- Hinged Lid Opens 60°, Locks Securely, and is Fully Removable
- Screw Lock
- Dimensions: 7.00" x 7.00" x 2.275"

HE-02NID-05



- Connector Capacity: 2 SC or 4 LC
- Splitter: 1x2
- Splices: Up to 4
- Input: OptiTap®-Compatible Connector
- Output: Flat Drop, ROC, and 3-16.2 mm Round Cable
- Hinged Lid Opens 60°, Locks Securely, and is Fully Removable
- Screw Lock
- Dimensions: 8.91" x 6.00" x 1.80"

HE-02NID-05LT



- Connector Capacity: 2 SC or 4 LC
- Splitter: 1x2
- Splices: Up to 4
- Output: Liquid-Tight Grommets for Flat Drop, ROC, and 3-5 mm Round Cable
- Hinged Lid Opens 60°, Locks Securely, and is Fully Removable
- Screw Lock
- Dimensions: 8.91" x 6.00" x 1.80"

SP-NID01-SPL



- Connector Capacity: 1 SC or 2 LC
- Input/Output: Flat Drop, ROC, and 3-16.2 mm Round Cable
- Built-In Storage for Up to 50 ft of Cable
- 1" Conduit Tie-Down
- Screw Lock
- Dimensions: 9.89" x 10.28" x 2.95"

SP-NID01-ONU




- Ubiquiti ONU
- Input/Output: Flat Drop, ROC, and 3-16.2 mm Round Cable
- Built-In Storage for Up to 50 ft of Cable
- 1" Conduit Tie-Down
- Screw Lock
- Dimensions: 9.89" x 10.28" x 2.95"

SP-NID01-LGX




- 1 LGX Adapter Panel
- Fiber Capacity: Up to 24 Fibers
- Splices: Up to 24
- Input/Output: Flat Drop, ROC, and 3-16.2 mm Round Cable
- Built-In Storage for Up to 50 ft of Cable
- 1" Conduit Tie-Down
- Screw Lock
- Dimensions: 9.89" x 10.28" x 2.95"

HE-02NID-02



- Connector Capacity: 2 SC or 4 LC
- Splitter: 1x2
- Separate Splice Tray: Up to 6 Splices
- Input: 1 x 10 mm and Dielectric Flat Drop
- Output: 4.8 mm
- Wall Mount
- Key Lock
- Dimensions: 8.18" x 6.02" x 2.04"


HE-06NID-01



- Connector Capacity: 6 SC or 8 LC (Patch & Splice) or 12 LC (Patch Only)
- Splitter: 1x4
- Input: 1 x 9 mm
- Output: 6 x 3 mm, 4.8 x 8 mm, or 1 x Flat Drop
- Wall Mount
- Screw Lock
- Dimensions: 8.26" x 5.51" x 1.52"


Indoor/Outdoor Fiber Enclosures — IP65-Rated

HE-12NID-01

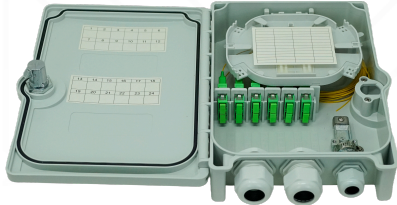


- Connector Capacity: 12 SC (Patch & Splice) or 24 LC (Patch Only)
- Splitter: Up to 1x8
- Splices: Up to 12
- Input: Liquid-Tight Grommet for Flat Drop or 1 x 10 mm Cable
- Output: Liquid-Tight Grommet for 2 x 9-18 mm Round Cable
- Key Lock
- Dimensions: 10.15" x 7.32" x 2.48"

HE-48NID-01

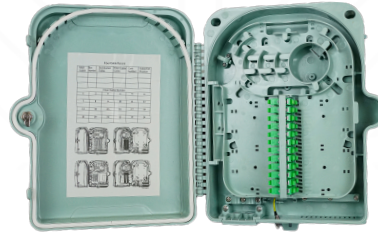

- Connector Capacity: 24 SC or 48 LC
- Splitter: Up to 1x16
- Splices: Up to 24
- Input: 2 x 14 mm
- Output: 24 x 5 mm
- Wall or Pole Mount
- Dimensions: 12.59" x 9.44" x 3.93"

HE-96NID-01

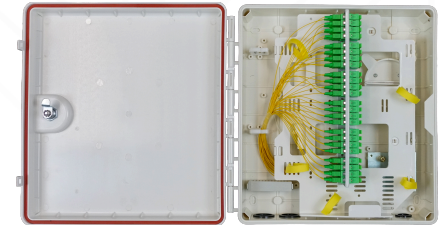

- Connector Capacity: 48 SC or 96 LC
- Splitter: Up to 1x48
- Splice Trays: 2 x 24 Fibers per Tray
- Cable OD: 2 x 19 mm, 2 x 25 mm
- Wall or Pole Mount
- Dimensions: 14.17" x 17.71" x 6.10"

MDU Wall-Mount Fiber Enclosure



- Connector Capacity: 48 SC or 96 LC
- 4 LGX Adapter Panels
- Splitter: Up to 1x16
- Splice Trays: 2 x 24 Fibers per Tray
- Wall Mount
- Key Lock with Dual-Door Design
- Dimensions: 21.0" x 13.33" x 4.75"

HE-SFMNT-01



- Connector Capacity: 2 SC or 4 LC
- Indoor Use, IK 9
- Single-Gang Electrical Box Mounting
- Slide-On Cover
- Dimensions: 7.08" x 3.26" x 0.94"

HE-SFMNT-LP



- Connector Capacity: 1 SC or 2 LC
- Indoor Use, IK 9
- Single-Gang Electrical Box Mounting
- Slide-On Cover
- Low-Profile Design
- Dimensions: 3.5" x 5.8" x 0.65"